

Ethernet I/O Modules: ADAM-6000/6200/6300


Introduction

Advantech's ADAM-6000/6200/6300 Ethernet I/O modules are easily integrated so they can remotely monitor and Cross-site Devices more flexibly.

Feature Highlights

Secure Cloud I/O


Innovative ADAM-6000/6200 Secure Cloud I/O offers device management, OTA updates, security and device monitoring functions in IoT era and help user easily manage widespread assets across diverse applications

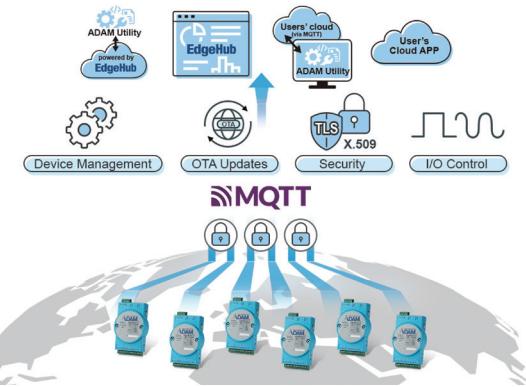

- **Device Management:** UUID, networking setting, I/O channel configuration
- **OTA Updates:** firmware, certificate and configuration mass deployment
- **Security:** TLS, X.509 certificate, cipher suites, IP allowlisting, protocol disabled
- **I/O Control:** digital I/O on/off, analog I/O read/write, I/O value periodically updated, alarm notification

Simple and Intuitive Logic Control

ADAM-6000/6200 Peer-to-Peer (P2P) and Graphic Condition Logic (GCL) modules can perform as standalone products for measurement, control, and automation.

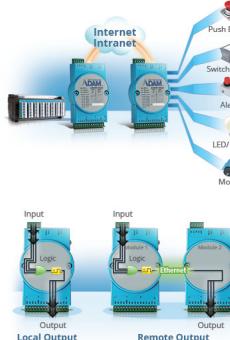

Peer-to-Peer (P2P) connection

- Easy channel mapping from different I/O modules without extra programming effort or additional controllers.
- Utilizes Peer-to-Peer modules, just configure settings through ADAM.NET utility.

Graphic condition logic (GCL)

- GCL function is built-in ADAM-6000 and ADAM-6200 modules for users to easily set up logic rules in any application.
- User defined logic rules through graphical configuration environment in ADAM.NET utility.
- No additional controllers or programming is needed.

Easy Deployment and Robust Communication




Flexible deployment with daisy chain networking and auto-bypass protection

ADAM-6200/6300 series supports daisy chain connectivity that offers flexible cabling and space saving capabilities. With Ethernet auto-bypass function supported to prevent accidental power failures if one of the modules unexpectedly shuts down.

Rich IoT Protocols

The ADAM-6000/6200 series supports multiple protocols for IoT applications: MQTT, SNMP, Restful APIs, and Modbus, which are very flexible and can be easily integrated with Microsoft Azure, Database, Network and SCADA systems.

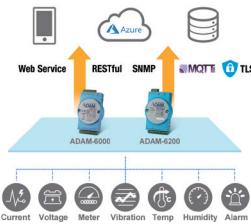

Cloud

- Support EdgeHub, Azure IoT Hub and any user's cloud.

MQTT

- Actively publish MQTT messages with user defined intervals.
- Shorten downtime with agile sequence of event ("ms" resolution) and alarm notification.

- Privacy assured with the TLS (Transport Layer Security).
- User defined topic and payload to integrate existing system.

SNMP

- Simple way to monitor I/O data on NMS (Network Management System).
- SNMP trap to notify alarm events.
- Reduces implementation cost with ADAM MIB (Management Information Base) file.

Industrial Grade with Isolation & Wide-operating


Temperature



ADAM-6000/6200/6300 series has a rugged design.

- Supports isolation protection to avoid system damage from high-energy noise.
- Supports operating temperatures of between -40~70°C and can perform in most harsh environments.


Application Structure

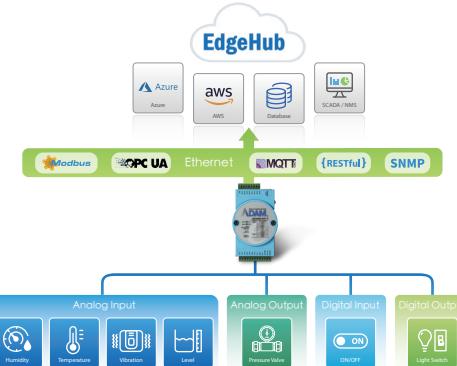

ADAM-6000/6200/6300 Series Comparison

Series Name	ADAM-6000 Series	ADAM-6200 Series	ADAM-6300 Series
Daisy-chain Connectivity	—	✓	✓
MQTT	✓	✓	(By request)
SNMP	✓	✓	(By request)
Modbus	✓	✓	✓
RESTful	✓	✓	(By request)
OPC UA	—	—	✓
Cloud I/O	✓	✓	(By request)

EdgeHub-enabled Cross-Site Device Management Solution

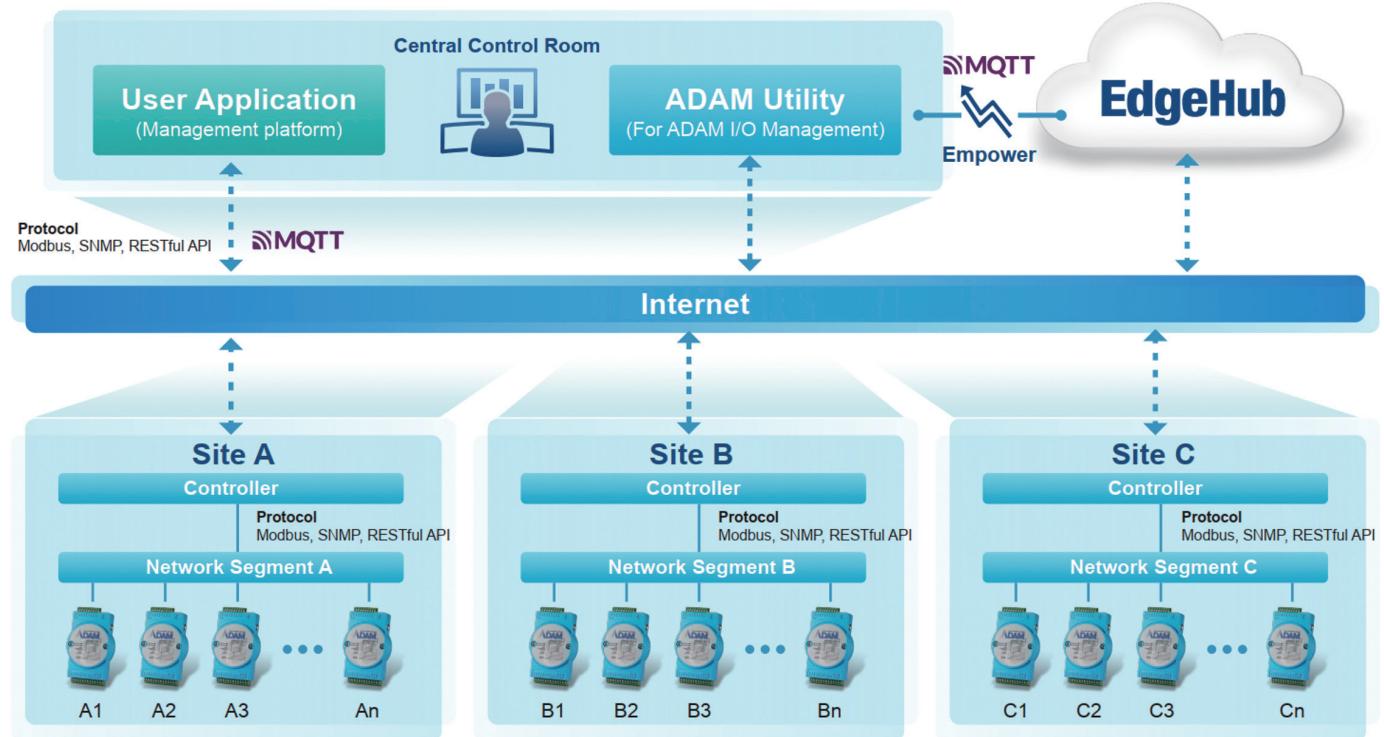

Direct I/O and Centralized Configuration

- EdgeHub enables device management with remote configuration, monitoring and maintenance capabilities for Advantech devices.
- Configure and maintain ADAM devices via ADAM Utility with built-in EdgeHub and web interface.
- Monitor and control I/O in real-time
- Manage user-defined configuration profiles and apply to devices
- Update device firmware remotely through secure OTA
- Manage multiple devices in groups with batch configuration and monitoring

Configurable Data Logging and Dashboard

- Flexible data logging and visualization with selectable tag configurations and customizable dashboard.
- Configure data logging by selecting I/O tags to store
- Customize web-based dashboard to view real-time and historical data

Multi-Tenant Architecture

- Support multiple organizations with isolated environments and resource management through tenant management.
- Tenant isolation – device, data storage, network traffic, API access
- Hierarchical tenant structures with parent-child relationships for enterprise deployments
- Tenant-specific user management and authentication
- Device connection quota management per tenant

Flexible Event Notification System

- User-defined event settings with real-time notification delivery through multiple communication channels.
- Define event rules based on device I/O tags
- Configure targeted notifications with customizable groups, users, and content
- Distribute alerts through email and other supported channels
- Track event history and acknowledgement status

Enterprise-Grade Access Control

- Secure access management with role-based control (RBAC) and user account
- Define role-based access control with customized permission sets
- Control user access right to devices configurations, monitoring and operations
- Manage user accounts with hierarchical roles and granular permissions

Effortless Cross-Site Management -
Free to Use Now!

More information on website

ADAM-6015

ADAM-6017

ADAM-6018+

7-ch Isolated RTD Input Modbus TCP Module
8-ch Isolated Analog Input Modbus TCP Module with 2-ch DO

8-ch Isolated Thermocouple Input Module



ADAM-6015



ADAM-6017



ADAM-6018+



Specifications

Analog Input

- Channels 7 (differential)
- Input Impedance $> 10 \text{ M}\Omega$
- Input Connections 2 or 3 wire
- Input Type Pt, Balco and Ni RTD
- RTD Types and Temperature Ranges

Pt 100	-50°C	~ 150°C
	0°C	~ 100°C
	0°C	~ 200°C
	0°C	~ 400°C
	-200°C	~ 200°C
Pt 1000	-40°C	~ 160°C
- Supports both IEC 60751 ITS90 (0.0385 W/W/C) and JIS C 1604 (0.0392 W/W/C)
- Balco 500 -30°C ~ 120°C
- Ni 518 -80°C ~ 100°C
- 0°C ~ 100°C
- Accuracy $\pm 0.1\%$ or better
- High speed mode $\pm 0.5\%$ or better
- Span Drift $\pm 25 \text{ ppm}/\text{°C}$
- Zero Drift $\pm 6 \text{ }\mu\text{V}/\text{°C}$
- Resolution 16-bit
- Sampling Rate 10 sample/ second (total)
- High speed mode: 1K sample/second (total)
- CMR @ 50/60 Hz 90dB
- NMR @ 50/60 Hz 60dB
- * high speed mode does not support CMR/NMR
- Wire Burnout Detection

Ordering Information

- ADAM-6015 7-ch Isolated RTD Input Modbus TCP Module

Specifications

Analog Input

- Channels 8 (differential)
- Input Impedance $> 10 \text{ M}\Omega$ (voltage)
 120Ω (current)
- Input Type mV, V, mA
- Input Range $\pm 150\text{mV}$, $\pm 500\text{mV}$, $\pm 1\text{V}$, $\pm 5\text{V}$, $\pm 10\text{V}$, $0 \sim 150\text{mV}$, $0 \sim 500\text{mV}$, $0 \sim 1\text{V}$, $0 \sim 5\text{V}$, $0 \sim 10\text{V}$, $0 \sim 20\text{mA}$, $4 \sim 20\text{mA}$, $\pm 20\text{mA}$
- Accuracy $\pm 0.1\%$ (voltage)
 $\pm 0.2\%$ (current)
- Span Drift $\pm 25 \text{ ppm}/\text{°C}$
- Zero Drift $\pm 6 \text{ }\mu\text{V}/\text{°C}$
- Resolution 16-bit
- Sampling Rate 10 or 100 sample/ second (total)
- Common-Mode Voltage CMR @ 50/60 Hz 90dB
NMR @ 50/60 Hz 67dB
- 350V_{DC}

Digital Output

- Channels 2, open collector to 30 V, 100 mA max. load
- Power Dissipation 300 mW for each module
- Output Delay On: 100 μ s
Off: 150 μ s

Ordering Information

- ADAM-6017 8-ch Isolated AI with 2-ch DO Modbus TCP Module

Specifications

Analog Input

- Channels 8 (differential)
- Input Type Thermocouple
- Thermocouple Type and Range:

J	0 ~ 760°C	R	500 ~ 1,750°C
K	0 ~ 1,370°C	S	500 ~ 1,750°C
T	-100 ~ 400°C	B	500 ~ 1,800°C
E	0 ~ 1,000°C		
- Accuracy@25°C Type J,K,E,R,S: $\pm 0.1\%$ FSR Max
Type B: $\pm 0.15\%$ FSR Max
Type T: $\pm 0.2\%$ FSR Max
- Span Drift $\pm 25 \text{ ppm}/\text{°C}$
- Zero Drift $\pm 6 \text{ }\mu\text{V}/\text{°C}$
- Resolution 16-bit
- Sampling Rate 10 sample/ second (total)
- Wire Burnout Detection

Ordering Information

- ADAM-6018+ 8-ch Isolated Thermocouple Input Module

Common Specifications

General

- Certification CE, FCC, UL
*Class I, Division 2, Groups A, B, C and D Hazardous Locations for ADAM-6015 and ADAM-6017
- LAN 10/100Base-T(X)
- Power Consumption 2.5 W @ 24 V_{DC} (ADAM-6015)
2.7 W @ 24 V_{DC} (ADAM-6017)
1 W @ 24 V_{DC} (ADAM-6018+)
- Connectors 1 x RJ-45 (LAN), Plug-in screw terminal block (I/O and power)

Watchdog

System (1.6 second)
and Communication
(programmable)

Power Input

10 ~ 30 V_{DC}

Supports Peer-to-Peer

Supports GCL

Supports Modbus/TCP, TCP/IP, UDP, RESTful

Supports MQTT (D version), SNMP (D version) Protocols (ADAM-6017 and ADAM-6018+)

Protection

- Isolation Protection 2,000 V_{DC}
- Built-in TVS/ESD Protection
- Power Reversal Protection

Environment

- Operating Temperature -10 ~ 70°C (14 ~ 158°F)
-40 ~ 70°C (-40-158°F)
(D version)
- Storage Temperature -20 ~ 80°C (-4 ~ 176°F)
-40 ~ 85°C (-40-185°F)
(D version)
- Operating Humidity 20 ~ 95% RH
(non-condensing)
- Storage Humidity 0 ~ 95% RH
(non-condensing)